




PLC control touch screen panel



Platform in / out movement  
(Pad clean underneath)



Auto pad clean

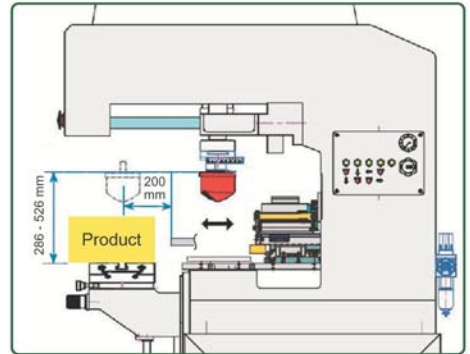

Maximum space for product/image with advantage of auto pad clean function

## FEATURES

- Single color large image pad printer
- Rigid all steel fabricated structure
- Both ink cup platform and pad carriage move in/out for maximum throat depth
- Pneumatic pad cylinder & pad in / our carriage
- Use sealed ink cup set up (up to print Ø155 mm image)
- Able to use laser engraved **Green plate**, thin steel plate and polymer plate
- Dead-on printing plate registration for quick job change
- PLC control touch screen panel
- Automatic pad clean with programmable cleaning cycle
- Pad stroke and speed adjustment
- Print functions: double ink or print, dwell and delay before print
- Digital pad stroke (DPS) for variable printing depth
- Heavy duty guide rail and runner blocks ensure friction-free movement
- Able to print the largest image amount machines of it's size

## SPECIFICATIONS

Ink cup size :	Ø165 mm
Printing plate size :	200 x 400 mm
Max. speed : (dry cycle) *	850 / hr.
Pad cylinder :	Ø100 x 150 mm
Pad compression :	3,016N
Pad carriage stroke (in/out) :	297 mm
Power :	110/220V
Air consumption :	540 litre/min. (approx.)
Accuracy +/- :	0.05 mm
Size : (L x W x H)	1,115 x 880 x 1,730 mm
Weight :	500 kg (approx.)

\*Please note that actual output may be affected by print requirement, ink drying condition, load/unload arrangement, pad stroke speed, pad hardness, production setup, product quality and production control.