

KENT TURBO130 (CE)




PLC control touch screen panel



Platform in / out movement
(Pad clean underneath)



AVC - Automatic Viscosity Control (patented)

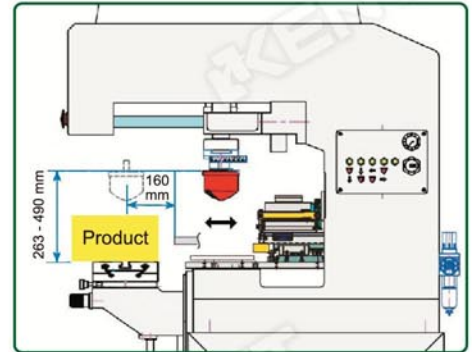

Maximum space for product/image with advantage of auto pad clean function



Auto pad clean

FEATURES

- Single color automatic pad printer
- Rigid aluminium cast machine frame
- Platform in/out movement
- Pneumatic power machine operation
- Use sealed TCIC / Green ink cup (patented) set up
- Powered with AVC - Automatic Viscosity Control (patented)
- Able to use laser engraved Green plate, thin steel plate and 10 mm steel plate
- Dead-on printing plate registration for quick job change
- PLC control touch screen panel
- Automatic pad clean with programmable cleaning cycle
- Pad stroke & speed adjustment
- Special functions: double ink / print cycles, dwell and delay before print
- Digital pad stroke (DPS) for variable printing depth
- Hardened ground steel shaft with impregnated bushing ensure friction-free movement
- High speed and smooth machine operations

SPECIFICATIONS

Ink cup size :	Ø125 mm
Printing plate size :	150 x 300 mm
Max. speed : (dry cycle) *	900 / hr.
Pad cylinder :	Ø63 x 125 mm
Pad compression :	1,870N
Pad carriage stroke (in/out) :	247 mm (Linear guide rail)
Power :	110/220V
Air consumption :	228 litre/min. (approx.)
Accuracy +/- :	0.05 mm
Size : (L x W x H)	974 x 810 x 1,690 mm
Weight :	380 kg (approx.)

* Please note that actual output may be affected by print requirement, ink drying condition, load/unload arrangement, pad stroke speed, pad hardness, production setup, product quality and production control.



www.kentpp.com

085M-0519

KENT ENGINEERING CO., LTD.

(Hong Kong) Tel: 852-2424 1899 Email: info@kent.com.hk

KENT ENGINEERING (GAO YAO) CO., LTD.

(Zhaoqing) Tel: 0758-8512 888 Email: kentgy@kentchina.com
 (Dongguan) Tel: 0769-8777 2010 Email: kentsg@kentchina.com
 (Wuxi) Tel: 0510-8522 0330 Email: kentsh@kent-pp.com.cn
 (Tianjin) Tel: 022-2795 8926 Email: kentjt@kent-pp.com.cn

