

The most advance and precise pad printer ever built




AVC - Automatic Viscosity Control (patented)



Auto pad clean

OPTIONAL

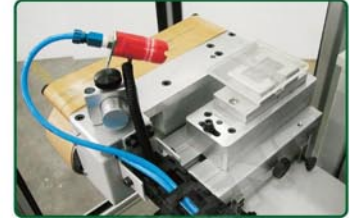

Anti-static blower



Product holding in/out shuttle

FEATURES

- All servo driven precision pad printer
- Heavy duty, oversize STAR Ball screw
- Precision guide rails pairing runner-blocks
- High speed design : pad moves up/down, printing plate moves in/out
- Pad guide rail moves below printing plate for high precision prints
- Programmable pad stroke
- Programmable printing plate position
- Adjustable ink release control
- Multi-speed pad movement for complex printing
- Oversize pad motor for maximum pad hardness
- Auto pad clean with programmable clean cycle
- Use **Green ink cup** (patented) set up
- Powered with AVC - Automatic Viscosity Control (patented)
- Dead-on " 0 " - adjustment fast job change
- PLC control touch screen interface

SPECIFICATIONS

Ink cup size :	Ø130 mm
Plate size :	150 x 300 mm
Speed : (dry cycle)*	1,200/hr.
Pad compression :	1000W servo motor
Pad carriage stroke (in/out) :	158 mm
Power :	220V 2KW
Air consumption :	40 L/min.
Accuracy :	+/- 0.02 mm
Repeatability :	+/- 0.02 mm
Size (LxWxH) :	1,040 x 725 x 1,850 mm
Weight :	335 kg (approx.)

* Please note that actual output may be affected by print requirement, ink drying condition, load/unload arrangement, pad stroke speed, pad hardness, production setup, product quality and production control.

