


High Value Added Series - The most versatile and user-friendly pad printer




AVC - Automatic Viscosity Control (patented)



Automatic pad clean

## OPTIONAL

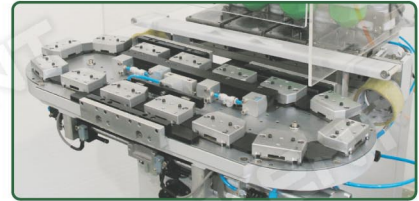

2-4 color Conveyor



2-4 color Pneumatic Shuttle



Pneumatic pad shuttle

## FEATURES

- Single or multi-color automatic pad printer
- Rigid aluminium casting machine frame
- Use **Green ink cup** (patented) set up
- Powered with AVC - Automatic Viscosity Control (patented)
- Compatible with long life, economy of **Green plate**, 10 mm steel plate and thin steel plate
- Dead-on printing plate registration for quick job change
- Microprocessor with membrane switch control panel
- Automatic pad clean with programmable cleaning cycle
- Special functions: double ink / print cycles, dwell and delay before print
- Digital pad stroke (DPS) for variable printing depths
- Newly improved MS-150 machine stand enhances stability
- Hardened ground steel shaft with impregnated bushing ensure friction-free movement
- High speed and smooth machine operations

## SPECIFICATIONS

Ink cup:	Ø 60, 70, 90, 130 mm
Ink cup plate size:	100 x 250, 150 x 300 mm
Max. speed: (dry cycle)*	1,200 Cycles / hr.
Max. pad pressure:	1,870N at 6 Bar / 100 PSI
Power:	110/220V 50/60Hz 30W
Air consumption:	230 Litre / Min. (Approx.)
Size: L x W x H	945 x 740 x 1,580 mm
Weight:	140 Kg (Approx.)

\*Please note that actual output may be affected by print requirement, ink drying condition, load/unload arrangement, pad stroke speed, pad hardness, production setup, product quality and production control.

